


ECULED212

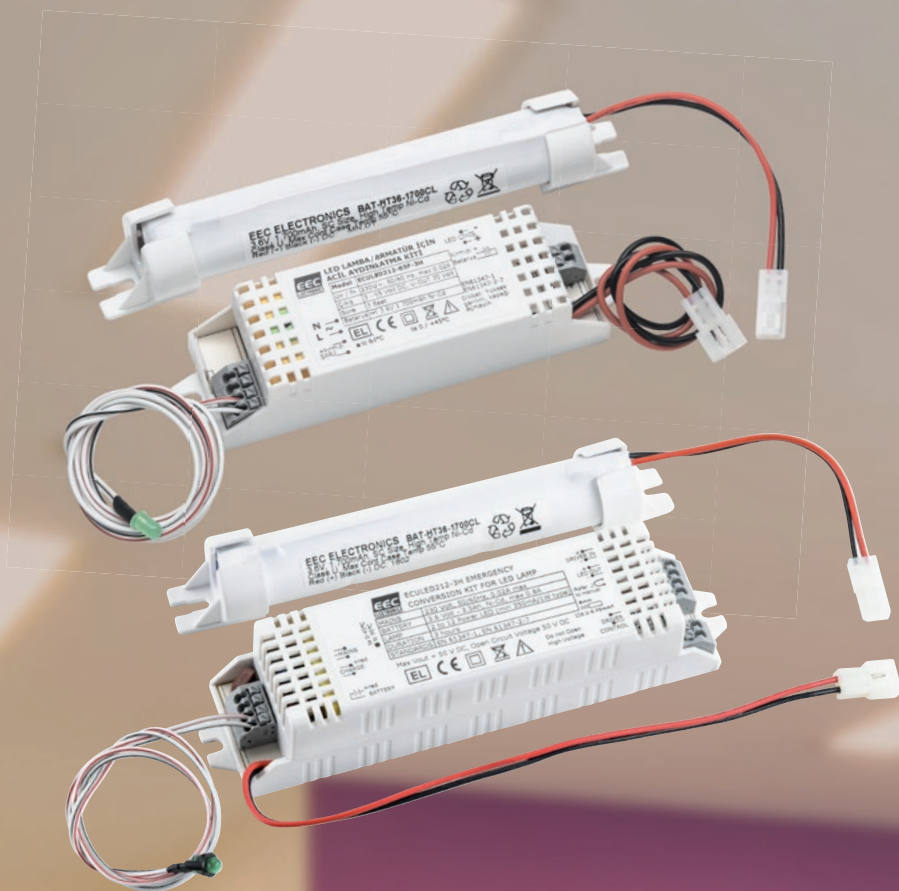

ECULED212

For LED Luminaires/
LED Modules



Specifications

Input	230 Volt AC, 50/60 Hz, max 0,025A
Power Consumption	max 5VA
Operating Mode	Non-maintained
Function	Standard & Self Test (XX-ST models)
Luminaire	LED light source
Battery	High Temp Ni-Cd batteries
Emergency Duration	1 or 3 hours
Charge Indicator	Green LED lamp
Fault Indicator	Red LED lamp (Self Test models)
Output Voltage	Refer to table below
Insulation Class	Class II (no earth wiring required)
Protection Class	IP20
Temperature	ta 0-45°C
Terminals	0.2 to 1.5mm ² quick fit terminal block
Enclosure	White thermoplastic housing




Dimensions (mm)

ECULED212



Battery	ØDxL	a	b	c	d
3.6V - 0.8Ah	15x150	12	18	16	6
3.6V - 1.7Ah	23x130	17	27	27	14
3.6V - 3.0Ah	26x150	19	30	30	8
3.6V - 3.5Ah	26x180	19	30	30	8
3.6V - 4.5Ah	33x190	25	37	37	16
4.8V - 1.7Ah	23x170	17	27	27	14
4.8V - 4.5Ah	33x240	25	37	37	16
6.0V - 1.7Ah	23x220	17	27	27	14
6.0V - 4.5Ah	33x290	25	37	37	16

ECULED212F



(*) Special type & configurations are available

Ordering Details

Code	Output	Duration	Battery
ECULED212-65F-1H	6 - 65 Volt	1 hour	3.6V - 0.8Ah
ECULED212-65F-3H		3 hours	3.6V - 1.7Ah
ECULED212-65HF-1H		1 hour	3.6V - 1.7Ah
ECULED212-65HF-3H		3 hours	3.6V - 4.5Ah
ECULED212-65UF-1H		1 hour	4.8V - 1.7Ah
ECULED212-65UF-3H		3 hours	4.8V - 4.5Ah
ECULED212-120F-1H	50 - 120 Volt	1 hour	4.8V - 0.8Ah
ECULED212-120F-3H		3 hours	4.8V - 1.7Ah
ECULED212-120HF-1H		1 hour	4.8V - 1.7Ah
ECULED212-120HF-3H		3 hours	4.8V - 4.5Ah
ECULED-212-1H	6 - 45 Volt	1 hour	3.6V - 1.7Ah
ECULED-212-3H		3 hours	3.6V - 3.5Ah
ECULED-212-65E-1H	6 - 65 Volt	1 hour	3.6V - 0.8Ah
ECULED-212-65E-3H		3 hours	3.6V - 1.7Ah
ECULED-212-65-1H	6 - 65 Volt	1 hour	3.6V - 1.7Ah
ECULED-212-65-3H		3 hours	3.6V - 3.0Ah
ECULED-212-65-ST-1H	6 - 65 Volt Self Test Function	1 hour	4.8V - 1.7Ah
ECULED-212-65-ST-3H		3 hours	4.8V - 3.0Ah

(*) Special requests are available