

Elegance



# Elegance


Emergency Luminaires & Exit Signs  
Surface Mounted, Single Sided

## Specifications

Application	Escape Sign, Anti-Panic Lighting, Escape Route lighting, Hazardous Area Lighting
Mounting	Direct mounting to wall & ceiling. Recessed mounting is available by accessory
Type	Manual Test, Self Test, DALI
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/3 hours
Viewing Distance	26m. Single sided
Light Source	LED module, 8 mid power leds, 6500K, CRI>80
Battery	3.6 Volt High temperature battery block, Ni-Cd/ Ni-MH
Wiring	Up to 2x2,5 mm <sup>2</sup> quick fit terminal block
Cable Entry	Four easy breakable entry holes back, rear & top parts
Power Supply	230 Volt, 50/60Hz, max 0,05A, max 5W
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing




## Dimensions (mm)

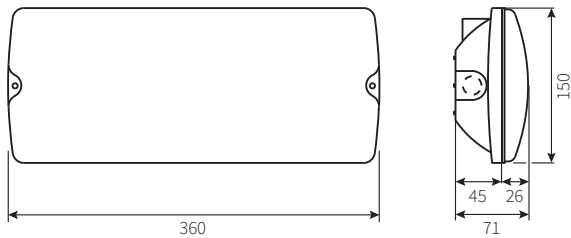


## Ordering Details

Code	Type	Battery	Light Output & Duration
ELG-SM8E	ECO	Ni-Cd	1 hour@151 Lumen or 3 hours@63 Lumen
ELG-SM15E			1 hour@252 Lumen or 3 hours@118 Lumen
ELG-SM15E-MH		Ni-MH	1 hour@252 Lumen or 3 hours@118 Lumen
ELG-SM22E-MH			1 hour@252 Lumen or 3 hours@173 Lumen
ELG-SM25E		Ni-Cd	1 hour@252 Lumen or 3 hours@200 Lumen
ELG-SM30E			1 hour@252 Lumen or 3 hours@237 Lumen
ELG-SM8-ST	SELF TEST	Ni-Cd	1 hour@151 Lumen or 3 hours@63 Lumen
ELG-SM15-ST			1 hour@252 Lumen or 3 hours@118 Lumen
ELG-SM15-ST-MH		Ni-MH	1 hour@252 Lumen or 3 hours@118 Lumen
ELG-SM22-ST-MH			1 hour@252 Lumen or 3 hours@173 Lumen
ELG-SM25-ST		Ni-Cd	1 hour@252 Lumen or 3 hours@200 Lumen
ELG-SM30-ST			1 hour@252 Lumen or 3 hours@237 Lumen
ELG-SM22-DALI	DALI	Ni-MH	3 hours@110 Lumen
ELG-824	CENTRAL	24 Volt AC/DC	
ELG-8230		230 Volt AC/DC	
ELG-PAD-S	Changeable sign PAD (inside the cover)		
ELG-PAD-W	Changeable white PAD for opal lighting effect (inside the cover)		
ELG-ANK	Recessed mounting box		
ELG-PRGRD	Protection grid		

## Polar Lighting Distribution Curve



## Viewing Distance



# Elegance Slim


Emergency Luminaires & Exit Signs  
Surface Mounted, Single Sided

## Specifications

Application	Escape Sign, Anti-Panic Lighting, Escape Route lighting, Hazardous Area Lighting
Mounting	Direct mounting to wall & ceiling. Recessed mounting is available by accessory
Type	Manual Test, Self Test, DALI
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/3 hours
Viewing Distance	23m. Single sided
Light Source	LED module, 12 mid power leds, 6500K, CRI>80
Battery	3.6 Volt High temperature battery block, Ni-Cd/ Ni-MH
Wiring	Up to 2x2,5 mm <sup>2</sup> quick fit terminal block
Cable Entry	Four easy breakable entry holes back, rear & top parts
Power Supply	230 Volt, 50/60Hz, max 0,05A, max 5W
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing




## Dimensions (mm)

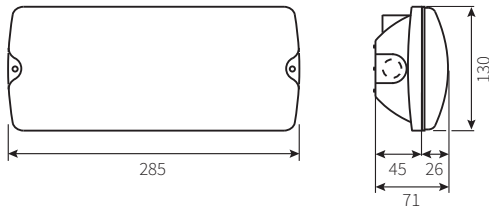


## Ordering Details

Code	Type	Battery	Led Light Output & Duration
ELGS-SM8E	ECO	Ni-Cd	1 hour@185 Lumen or 3 hours@77 Lumen
ELGS-SM15E			1 hour@232 Lumen or 3 hours@145 Lumen
ELGS-SM15E-MH		Ni-MH	1 hour@232 Lumen or 3 hours@145 Lumen
ELGS-SM22E-MH			1 hour@278 Lumen or 3 hours@212 Lumen
ELGS-SM8-ST	SELF TEST	Ni-Cd	1 hour@185 Lumen or 3 hours@77 Lumen
ELGS-SM15-ST			1 hour@232 Lumen or 3 hours@145 Lumen
ELGS-SM15-ST-MH		Ni-MH	1 hour@232 Lumen or 3 hours@145 Lumen
ELGS-SM22-ST-MH			1 hour@278 Lumen or 3 hours@212 Lumen
ELGS-SM22-DALI	DALI	Ni-MH	3 hours@135 Lumen
ELGS-1224	CENTRAL	24 Volt AC/DC	
ELGS-12230		230 Volt AC/DC	
ELGS-PAD-S	Changeable sign PAD (inside the cover)		
ELGS-PAD-W	Changeable white PAD for opal lighting effect (inside the cover)		
ELGS-ANK	Recessed mounting box		
ELG-PRGRD	Protection grid		

## Polar Lighting Distribution Curve



## Viewing Distance



# Elegance Double


Emergency Exit Signs  
Surface Mounted, Double Sided

## Specifications


Application	Escape Sign
Mounting	Direct mounting to ceiling. Suspended, recessed & flag mounting is available by accessories
Type	Manual Test, Self Test, DALI
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/3 hours
Viewing Distance	24m. Single & double sided
Light Source	LED module, 12 mid power leds, 6500K, CRI>80
Battery	3.6 Volt High temperature battery block, Ni-Cd/ Ni-MH
Wiring	Up to 2x2,5 mm <sup>2</sup> quick fit terminal block
Cable Entry	Four easy breakable entry holes back, rear & top parts
Power Supply	230 Volt, 50/60Hz, max 0,05A, max 5W
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing



Viewing Distance



## Dimensions (mm)

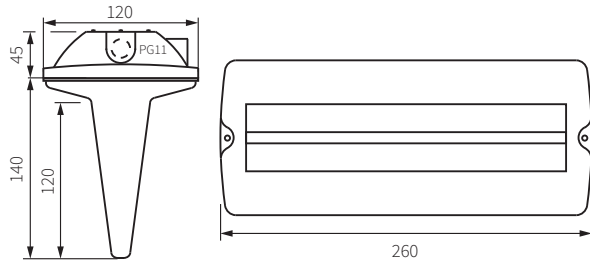

## Ordering Details

Code	Type	Battery	LED Module
ELGD-SM8E	ECO	Ni-Cd	1 hour@236 Lumen or 3 hours@98 Lumen
ELGD-SM15E			1 hour@390 Lumen or 3 hours@184 Lumen
ELGD-SM15E-MH		Ni-MH	1 hour@390 Lumen or 3 hours@184 Lumen
ELGD-SM22E-MH			1 hour@390 Lumen or 3 hours@270 Lumen
ELGD-SM8-ST	SELF TEST	Ni-Cd	1 hour@236 Lumen or 3 hours@98 Lumen
ELGD-SM15-ST			1 hour@390 Lumen or 3 hours@184 Lumen
ELGD-SM15-ST-MH		Ni-MH	1 hour@390 Lumen or 3 hours@184 Lumen
ELGD-SM22-ST-MH			1 hour@390 Lumen or 3 hours@270 Lumen
ELGD-SM22-DALI	DALI	Ni-MH	3 hours@172 Lumen
ELGD-1224	CENTRAL	24 Volt AC/DC	172 Lumen
ELGD-12230		230 Volt AC/DC	
ELGD-ANK	Recessed mounting box		