

# StarLED



# StarLED


Emergency Luminaires & Exit Signs  
Surface Mounted, Single or Double Sided

## Specifications

Application	Escape Sign, Anti-Panic Lighting, Escape Route lighting, Hazardous Area Lighting
Mounting	Direct mounting to wall & ceiling. Suspended & recessed mounting is available by accessories
Type	Manual Test, Self Test, DALI
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/3 hours
Viewing Distance	24m. Single sided, double sided by perspex slab
Light Source	LED module, 8 mid power leds, 6500K, CRI>80
Battery	3.6 Volt High temperature battery block, Ni-Cd/ Ni-MH
Wiring	Up to 2x2,5 mm <sup>2</sup> quick fit terminal block
Cable Entry	Four easy breakable entry holes back, rear & top parts
Power Supply	230 Volt, 50/60Hz, max 0,05A, max 5W
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing




## Dimensions (mm)

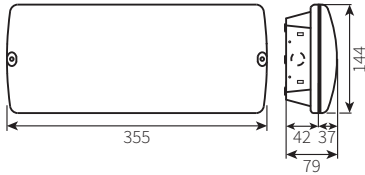

## Ordering Details

Code	Type	LED Module	Duration & Lumen Output
STR-SM8E	ECO	8 pcs Mid Power LED	1 hour 123 Lumen or 3 hours 51 Lumen
STR-SM15E			1 hour 205 Lumen or 3 hours 100 Lumen
STR-SM15E-MH			1 hour 205 Lumen or 3 hours 100 Lumen
STR-SM22E-MH			1 hour 205 Lumen or 3 hours 141 Lumen
STR-SM25E			1 hour 205 Lumen or 3 hours 160 Lumen
STR-SM30E			1 hour 205 Lumen or 3 hours 192 Lumen
STR-SM106P-1H	6 pcs Power LED	6 pcs Power LED	1 hour 320 Lumen
STR-SM106PH-1H			1 hour 544 Lumen
STR-SM106P-3H			3 hours 320 Lumen
STR-SM8-ST	SELF TEST	8 pcs Mid Power LED	1 hour 123 Lumen or 3 hours 51 Lumen
STR-SM15-ST			1 hour 205 Lumen or 3 hours 100 Lumen
STR-SM15-ST-MH			1 hour 205 Lumen or 3 hours 141 Lumen
STR-SM22-ST-MH			1 hour 205 Lumen or 3 hours 160 Lumen
STR-SM25-ST			1 hour 205 Lumen or 3 hours 192 Lumen
STR-SM30-ST			1 hour 205 Lumen or 3 hours 192 Lumen
STR-SM106P-1H-ST	6 pcs Power LED	6 pcs Power LED	1 hour 320 Lumen
STR-SM106PH-1H-ST			1 hour 544 Lumen
STR-SM106P-3H-ST			3 hours 320 Lumen
STR-SM15-DALI	DALI	8 pcs Mid Power LED	3 hours 100 Lumen
STR-SM22-DALI			3 hours 140 Lumen
STR-1824	CENTRAL	8 pcs Mid Power LED	205 Lumen
STR-18230			205 Lumen
STR-16P24			320 Lumen
STR-16P230			672 Lumen
STR-ETK	Self adhesive sign sheet (standard signs)		
STR-PPX-CVR	Perspex cover		
STR-PLX-S	Perspex sign - screen printed		
STR-PLX-P	Perspex sign - engraved type		

## Polar Lighting Distribution Curve



## Viewing Distance

