

# Multilite



507

# Multilite


Emergency Luminaires & Exit Signs  
Surface Mounted, Single or Double Sided

## Specifications

Application	Escape Sign
Mounting	Direct mounting to wall & ceiling. Suspended, recessed & flag mounting are available by accessories
Type	Manual Test, Self Test, DALI
Mode	Selectable maintained/non-maintained
Emergency Duration	Selectable 1/2/3/8 hours
Viewing Distance	23m, 30m. Single & double sided
Light Source	LED module, 20 mid power leds, 6500K, CRI>80
Battery	3.6 Volt High temperature battery block, Ni-Cd/ Ni-MH
Wiring	Up to 2x2,5 mm <sup>2</sup> quick fit terminal block
Cable Entry	Two easy breakable entry holes rear & upper part
Power Supply	230 Volt, 50/60Hz, max 0,03A, max 5W
Protection	IP40
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing



## Dimensions (mm)

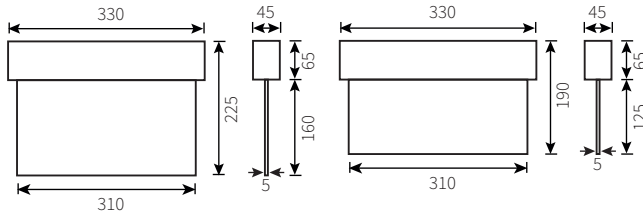

## Ordering Details

Code	Description	Led Light Output & Duration
MTL-SM23E	VD 23m	Standard type, 23m viewing distance, with sign pad
MTL-SM23ST		Self-test type, 23m viewing distance, with sign pad
MTL-SM23DALI		DALI type, 23m viewing distance, with sign pad
MTL-SM30E	VD 30m	Standard type, 30m viewing distance, with sign pad
MTL-SM30ST		Self-test type, 30m viewing distance, with sign pad
MTL-SM30DALI		DALI type, 30m viewing distance, with sign pad
MTL-SSWR 2M		Suspended type hanging set (2m)
MTL-REC	Mounting set	Recessed mounting set
MTL-FLAG		Flag mounting set
MTL-23-LFT	Legends 23m	23m left type sign
MTL-23-RGT		23m right type sign
MTL-23-UP		23m up type sign
MTL-23-DWN		23m down type sign
MTL-23-pad		23m white pad for single side use
MTL-30-LFT	Legends 30m	30m left type sign
MTL-30-RGT		30m right type sign
MTL-30-UP		30m up type sign
MTL-30-DWN		30m down type sign
MTL-23-PAD		30m white pad for single side use

## Viewing Distance

