

Brilite



Brilite


Emergency Exit Signs
Surface & Recessed Mounted, Single/Double Sided

Specifications

Application	Escape Sign
Mounting	Direct mounting to ceiling. Wall, suspended, recessed & flag mounting are available by accessories
Type	Manual, Self Test, DALI
Mode	Maintained
Emergency Duration	3 hours
Viewing Distance	30m. Single & double sided
Light Source	20xLeds, 6500K, CRI>80, 120 Lumen
Battery	3.6 Volt High temperature battery block Ni-Cd/ Ni-MH
Wiring	Up to 2x2,5 mm ² quick fit terminal block
Power Supply	230 Volt, 50/60Hz, max 0,03A, max 4W
Protection	IP30
Temperature Range	0-40°C
Electrical Class	Class I
Material	Powder paint coated steel sheet housing
Color	White



Dimensions (mm)

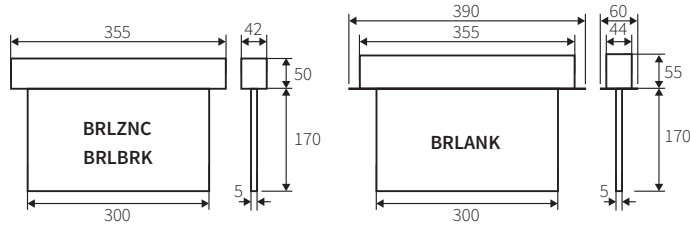

Ordering Details

Product Code	Mounting Detail	Type
BRLZNC-M320	Suspended	Standard
BRLBRK-M320	Bracket	
BRLANK-M320	Recessed	
BRLZNC-M320-ST	Suspended	Self-Test
BRLBRK-M320-ST	Bracket	
BRLANK-M320-ST	Recessed	
BRLZNC-M320-DALI	Suspended	DALI
BRLBRK-M320-DALI	Bracket	
BRLANK-M320-DALI	Recessed	
BRLZNC-2024	Suspended	Central
BRLBRK-2024	Bracket	
BRLANK-2024	Recessed	
BRLZNC-20230	Suspended	
BRLBRK-20230	Bracket	
BRLANK-20230	Recessed	

* Stainless steel housing available on request

Viewing Distance

