

# Superlite



# Superlite


Emergency Luminaires  
Surface Mounted, Single/Double Sided

## Specifications

Application	Anti-Panic Lighting, Escape Route lighting, Hazardous Area Lighting
Mounting	Direct mounting to wall & ceiling
Version	Manual Test, Self Test, DALI
Mode	Selectable maintained/non-maintained
Emergency Duration	1/3 hours
Light Source	LED module, 6 or 9 mid power leds, 4000K, CRI>80
Battery	3.6 Volt High temperature battery block, Ni-Cd
Wiring	Up to 2x2,5 mm <sup>2</sup> quick fit terminal block
Power Supply	230 Volt, 50/60Hz, max 0,1A, max 12W
Protection	IP65
Temperature Range	5-40°C
Electrical Class	Class II (no earth wiring required)
Material	White polycarbonate housing



## Dimensions (mm)

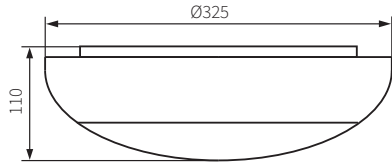

## Ordering Details

Product Code	Light Source	Operating Mode	Lümen Output	Duration
SPL-NM106	6x1W Power LED	NM - Non Maintained	205 Lumen	1 hour
SPL-NM106H			408 Lumen	1 hour
SPL-NM306			190 Lumen	3 hours
SPL-SM106		SM - Switchable Maintained (Lsw wiring required)	205 Lumen	1 hour
SPL-SM106H			408 Lumen	1 hour
SPL-SM306			190 Lumen	3 hours
SPL-6230		230V AC/DC	595 Lumen	Central
SPL-SM109	9x1W Power LED	SM - Switchable Maintained (Lsw wiring required)	205 Lumen	1 hour
SPL-SM109H			408 Lumen	1 hour
SPL-SM309			190 Lumen	3 hours
SPL-9230		230V AC/DC	885 Lumen	Central

## Polar Lighting Distribution Curve

