

Ultralite




Ultralite

Emergency Exit Signs
Surface or Recessed Mounted, Single/Double Sided

Specifications

Application	Escape Sign
Mounting	Direct mounting to ceiling & wall, suspended, recessed & flag mounting is available by accessories
Type	Manual test, self test, DALI
Mode	Maintained
Emergency Duration	3 hours
Viewing Distance	24m, 30m. Single or double sided
Light Source	LED module, 10/20 (DALI) mid power leds, 6500K, CRI>80
Battery	3.6 Volt High temperature battery block, Ni-Cd/ Ni-MH (DALI)
Wiring	Flying leads
Power Supply	230 Volt, 50/60Hz, max 0,05A, max 4W
Protection	IP30
Temperature Range	0-35°C
Electrical Class	Class I
Material	Aluminium / Silver

Dimensions (mm)

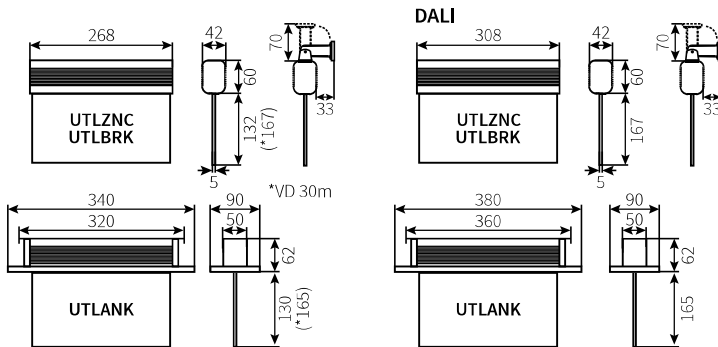

UTLZNC



UTLBRK



UTLANK



Ordering Details

Product Code	Type	Operating Mode	Mounting Details	Light Source	Viewing Distance		
UTLZNC-M310	Standard	M Maintained	Chain	10xLED (60 Lumen)	24m		
UTLBRK-M310			Bracket				
UTLANK-M310			Recessed				
UTLZNC-M310-ST	Self-Test	M Maintained	Chain				
UTLBRK-M310-ST			Bracket				
UTLANK-M310-ST			Recessed				
UTLZNC-SM320-DALI	DALI	SM Switchable Maintained (M/NM together)	Chain	20xLED (120 Lumen)	30m		
UTLBRK-SM320-DALI			Bracket				
UTLANK-SM320-DALI			Recessed				
UTLHZN-M310	Standard	M Maintained	Chain			10xLED (60 Lumen)	30m
UTLHBRK-M310			Bracket				
UTLHANK-M310			Recessed				
UTLHZN-M310-ST	Self-Test	M Maintained	Chain				
UTLHBRK-M310-ST			Bracket				
UTLHANK-M310-ST			Recessed				
UTLHZN-SM320-DALI	DALI	SM Switchable Maintained (M/NM together)	Chain	20xLED (120 Lumen)	30m		
UTLHBRK-SM320-DALI			Bracket				
UTLHANK-SM320-DALI			Recessed				

Viewing Distance

