

Ecosign, Midilite, Maxilite



Ecosign, Midilite, Maxilite

Emergency Exit Signs / Surface Mounted, Single/Double Sided

Specifications

Application	Escape Sign
Mounting	Wall, ceiling & suspended
Type	Manual, Self Test, DALI
Mode	Maintained
Emergency Duration	1, 3 hours
Viewing Distance	Ecosign: 30m. Midilite: 36m. Maxilite: 80m. Single & double sided
Light Source	Led Strip, 6500K, CRI>80, Ecosign & Midilite: 216 Lumen Maxilite: 432 Lumen
Battery	3.6 Volt High temperature battery block Ni-Cd/ Ni-MH
Wiring	Up to 2x2,5 mm ² quick fit terminal block
Power Supply	230 Volt, 50/60Hz, max 0,03A, max 10W
Protection	IP40, IP65 is available
Temperature Range	0-40°C
Electrical Class	Class I
Material	Powder paint coated steel sheet housing

Ecosign



Midilite




Maxilite




Dimensions (mm)


Ecosign



Midilite

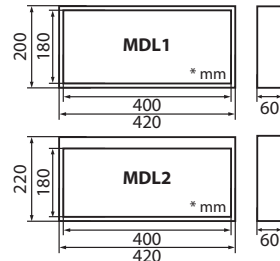

Maxilite

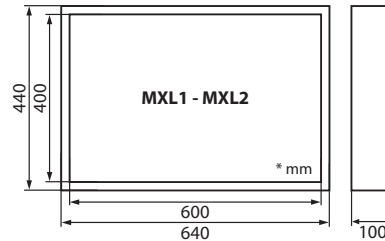


Ordering Details


Product Code			Type	Duration
Ecosign	Midilite	Maxilite		
ECSH1 Series Single Sided	MDL1 Series Single Sided	MXL1 Series Single Sided		
ECSH1LEDS-M218-1H	MDL1LEDS-M218-1H	MXL1LEDS-M418-1H	Standart	1 hour
ECSH1LEDS-M218-3H	MDL1LEDS-M218-3H	MXL1LEDS-M418-3H	Standart	3 hours
ECSH1LEDS-M218-1H-ST	MDL1LEDS-M218-1H-ST	MXL1LEDS-M418-1H-ST	Self-Test	1 hour
ECSH1LEDS-M218-3H-ST	MDL1LEDS-M218-3H-ST	MXL1LEDS-M418-3H-ST	Self-Test	3 hours
ECSH1LEDS-M218-3H-DALI	MDL1LEDS-M218-3H-DALI	MXL1LEDS-M418-3H-DALI	DALI	3 hours
ECSH2 Series Double Sided	MDL2 Series Double Sided	MXL2 Series Double Sided		
ECSH2LEDS-M218-1H	MDL2LEDS-M218-1H	MXL2LEDS-M418-1H	Standart	1 hour
ECSH2LEDS-M218-3H	MDL2LEDS-M218-3H	MXL2LEDS-M418-3H	Standart	3 hours
ECSH2LEDS-M218-1H-ST	MDL2LEDS-M218-1H-ST	MXL2LEDS-M418-1H-ST	Self-Test	1 hour
ECSH2LEDS-M218-3H-ST	MDL2LEDS-M218-3H-ST	MXL2LEDS-M418-3H-ST	Self-Test	3 hours
ECSH2LEDS-M218-3H-DALI	MDL2LEDS-M218-3H-DALI	MXL2LEDS-M418-3H-DALI	DALI	3 hours

Viewing Distance

Ecosign

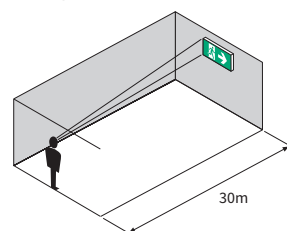

Midilite

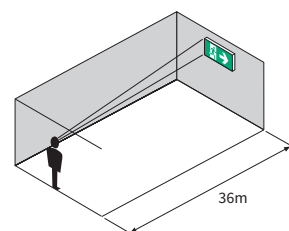

Maxilite

