

ECULEDAC



ECULEDAC


For Retrofit Lamps (T5, T8 LED Tube & GU10, E27 type lamps)

Specifications

System Mode	Non-maintained), maintained or switchable maintained
Input Voltage	230 Volt AC, 50/60Hz
Emergency Duration	1 or 3 hours
LED Output	Current & Voltage controlled, min 80% efficiency,
LED Lamp	Refer to the table below
Battery	Refer to the table below
Charging Unit	Current & Voltage controlled charger
Battery Protection	Overcharge and deep discharge protection
Charge Duration	24/48 hours
Charge Indicator	Green LED lamp
Isolation Class	Class II (No earth wiring required)
Temperature	0 – 40°C
Humidity	% 20 - 90 RH (RH)
Enclosure	White thermoplastic housing
Color	White



Dimensions (mm)

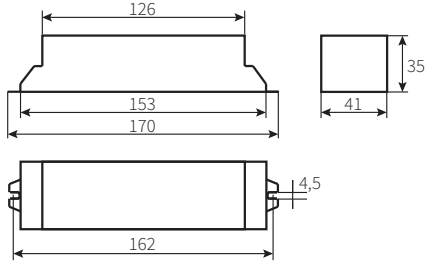

Ordering Details

Product Code	Ni-CD Battery Group		Max. Lamp Power with Emergency Duration		
	Voltage ve Capacity	Dimensions (mm)	1 Hour	2 Hours	3 Hours
ECULEDAC-4817	4.8 Volt, 1.7Ah Ni-Cd	Ø 23 X 170	4W		
ECULEDAC-4845	4.8 Volt, 4.5Ah Ni-Cd	Ø 33 X 240	11W	6W	4W
ECULEDAC-6017	6.0 Volt, 1.7Ah Ni-Cd	Ø 23 X 220	5W		
ECULEDAC-6045	6.0 Volt, 4.5Ah Ni-Cd	Ø 33 X 300	14W	7W	5W
ECULEDAC-7217	7.2 Volt, 1.7Ah Ni-Cd	2 pcs Ø 23 X 130	6W		
ECULEDAC-7235	7.2 Volt, 3.5Ah Ni-Cd	2 pcs Ø 26 X 180	13W	7W	5W
ECULEDAC-7245	7.2 Volt, 4.5Ah Ni-Cd	2 pcs Ø 33 X 180	16W	9W	7W
ECULEDAC-9617	9.6 Volt, 1.7Ah Ni-Cd	2 pcs Ø 23 X 170	8W		
ECULEDAC-9645	9.6 Volt, 4.5Ah Ni-Cd	2 pcs Ø 33 X 240	22W	12W	9W
ECULEDAC-12017	12 Volt, 1.7Ah Ni-Cd	2 pcs Ø 23 X 220	10W		
ECULEDAC-12045	12 Volt, 4.5Ah Ni-Cd	2 pcs Ø 33 X 300	28W	15W	11W
ECULEDAC-14445	14.4 Volt, 4.5Ah Ni-Cd	2 pcs Ø 33 X 360	33W	18W	14W

Wiring

