

ECULED1



ECULED1



For Single LED Lamps/
LED Modules

Specifications

Input	230 Volt AC, 50/60 Hz, max 0,025A
Power Consumption	max 5VA
Operating Mode	Non-maintained
Luminaire	LED light source
Battery	High Temp Ni-Cd & Ni-MH batteries
Emergency Duration	1 or 3 hours
Charge Indicator	Green LED lamp
Output	Single LED lamp/LED module
Insulation Class	Class II (no earth wiring required)
Protection Class	IP20
Temperature	ta 0-45°C
Terminals	0.2 to 1.5mm ² quick fit terminal block
Enclosure	White thermoplastic housing



Dimensions (mm)

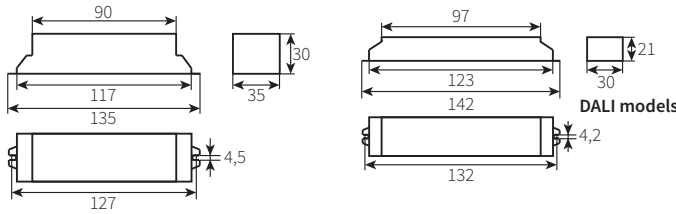

Battery		ØDxL	a	b	c	d
3.6V - 0.8Ah	Ni-Cd	15x150	12	18	16	6
3.6V - 1.2Ah	Ni-Cd	23x130	17	27	27	14
3.6V - 3.0Ah	Ni-Cd	26x150	19	30	30	8
3.6V - 1.5Ah	Ni-MH	15x150	12	18	16	6
3.6V - 2.2Ah	Ni-MH	23x130	17	27	27	14

(*) Special type & configurations are available

Ordering Details

Code	Type	Output	Duration	Battery
ECULED1350-1H	ECO	320/350mA 135 Lumen	1 hour	3.6V - 0.8Ah
ECULED1350-3H			3 hours	3.6V
ECULED1700-1H		640/700mA 210 Lumen	1 hour	3.6V - 3.0Ah
ECULED1700-3H			3 hours	3.6V - 3.0Ah
ECULED1350-ST-1H	SELF TEST	320/350mA 135 Lumen	1 hour	3.6V - 0.8Ah
ECULED1350-ST-3H			3 hours	3.6V
ECULED1700-ST-1H		640/700mA 210 Lumen	1 hour	3.6V - 3.0Ah
ECULED1700-ST-3H			3 hours	3.6V - 3.0Ah
ECULED1350-3H-DALI	DALI	320/350mA 135 Lumen	3 hours	3.6V - 1.5Ah
ECULED1500-3H-DALI		450/500mA 180 Lumen	3 hours	3.6V - 2.2Ah

(*) Special requests are available